


# Mobi-Deck



## RIGID FLOOR FOR TENT

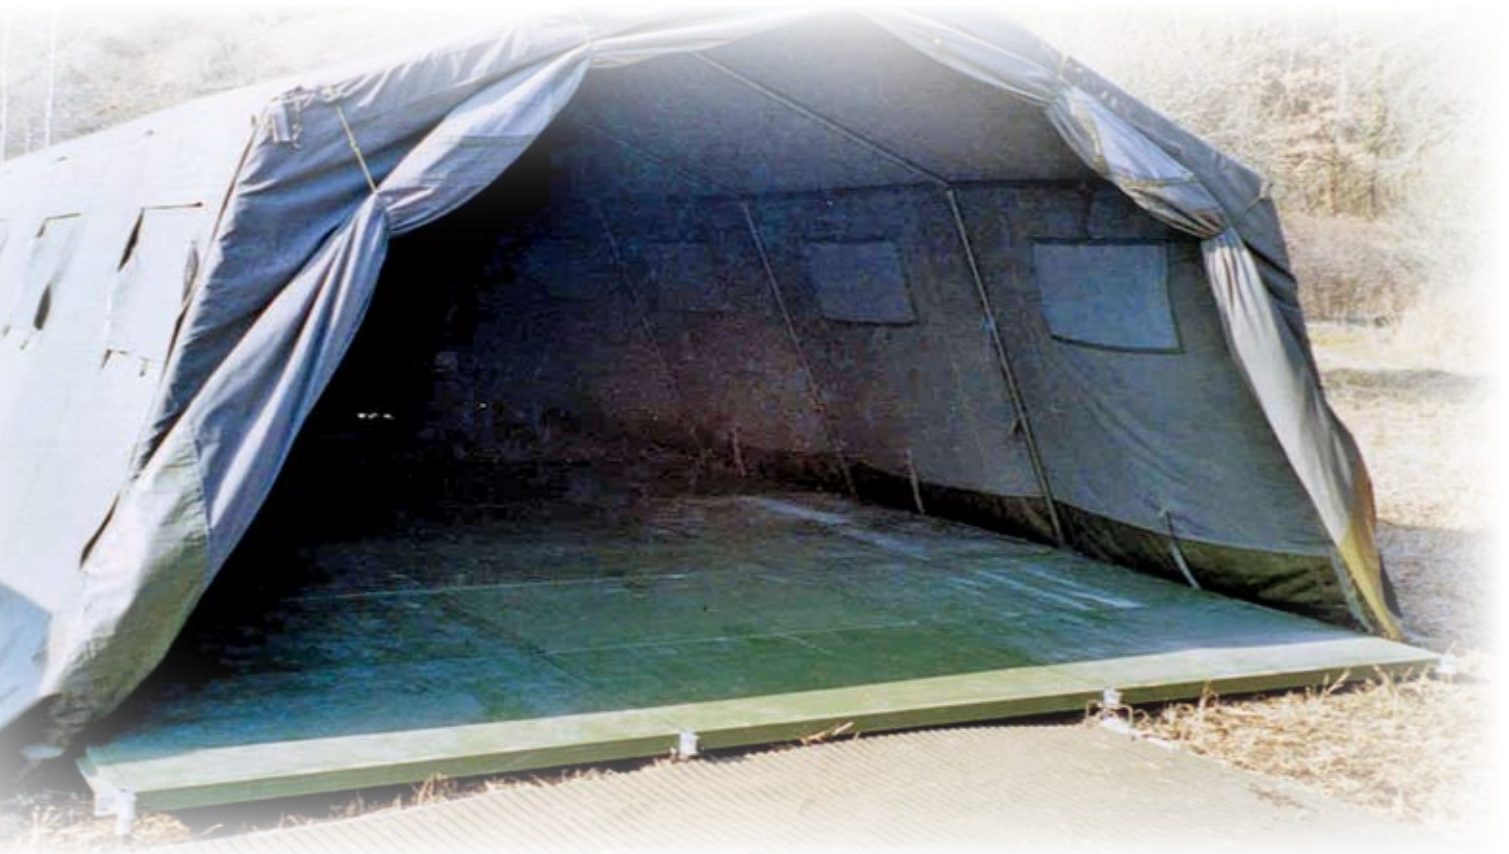

**Mobi-Deck is the ideal and innovating solution for assuring a dry floor with any type of tent and protecting people and equipment from flooding. Mobi-Deck's air transportability supports the requirements for today's expeditionary military.**

### **Fast installation**

Made of adjustable panels, a two-person crew can install Mobi-Deck at a rate of 50 square meters (538 sqft) per hour. Less than 30 minutes are required for a 55 square meters tent (592 sqft tent).

### **Lightweight**

Each panel weighs 35 lb (15 kg). The panels are stackable and compatible with air transport pallets.

### **Easy handling**

Each panel can be carried with suction discs.

### **Safe**

Mobi-Deck uses a raised connecting frame, which not only supports the decking material but also assists with cable distribution and integration. This feature is ideal to create temporary flooring for command posts.

### **Adjustable height**

Up to 7" (180 mm), feet adjustment is possible from the top surface.

### **Modularity**

Unlimited in length and width

### **Non-slip surface**





## Technical Characteristics

Kit P/N	MD500/180	
Designation	MOBI-DECK 500 with adjustable feet*	
Mechanical resistance	500 kg/m <sup>2</sup>	102,5 lb/sqft
Deck dimensions	Depends on shelter dimensions	
Panel dimensions	1.6 m x 1.1m	63" x 43"
Panel weight	15 kg	35 lb
Module** dimensions	2,28m x 1,68m	89" x 66"
Quantity of modules	Depends on shelter dimensions	
Illustration*** of a kit		

- \* Adjustable height = 180 mm (7")
- \*\* 1 Module is made of 2 panels
- \*\*\* Actual products may differ from illustrations



Helipad



Ground Improvement Mat



Tentfloor



Usine de Bourisson  
 BP 20 - 16400 La Couronne - France  
 Tél. + 33 (0) 545 677 030 - Fax. + 33 (0) 545 678 160  
 deschamps@deschamps.fr



[www.mobi-mat.com](http://www.mobi-mat.com)



4 Peckman Road  
 Little Falls NJ 07424, USA  
 Tél. + 1 973 237 0691 - Fax. + 1 973 237 1660  
 info@mobi-mat-dms.com